


gorenje

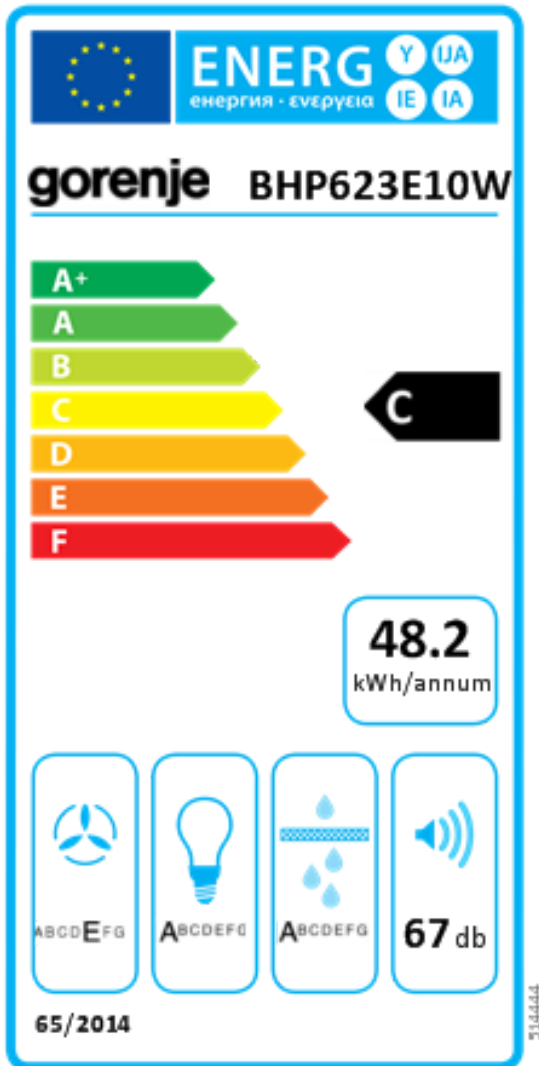

OPLYSNINGSSKEMA

| | |
|-------------------------------------------------------------------------------------------|-------------------------|
| Model | BHP623E10W |
| Annual Energy Consumption - AEC _{hood} | 48,2 kWh/a |
| Energi klasse | C |
| Fluid Dynamic Efficiency - FDE | 10,5 % |
| Fluid Dynamic Efficiency class | E |
| Light Efficiency - LE _{hood} | 47,7 lux/W |
| Lighting Efficiency Class | A |
| Grease Filtering Efficiency - GFE _{hood} | 98,7 % |
| Grease Filtering Efficiency class | A |
| A-weighted Sound Power Emission at minimum speed | 144 m ³ /h |
| Maximum Air Flow in normal use | 328 m ³ /h |
| Air Flow at intensive/boost setting | - |
| A-weighted Sound Power Emission at minimum speed | - |
| A-weighted Sound Power Emission at maximum speed | 67 dB(A) re 1pW |
| A-weighted Sound Power Emission at intensive or boost speed | - |
| Power consumption off mode - P _O | - |
| Power consumption in standby mode - P _S | - |
| Time increase factor | 1,6 |
| Energy Efficiency Index -EEI | 81,4 |
| Measured air flow rate at best efficiency point - Q _{bep} | 185,8 m ³ /h |
| Measured air pressure at best efficiency point - P _{bep} | 150,0 Pa |
| Maximum air flow - Q _{max} | 328 m ³ /h |
| Measured electric power input at best efficiency point - W _{bep} | 73,9 W |
| Nominal power of the lighting system - W _L | 6,0 W |
| Average illumination of the lighting system on the cooking surface - E _{average} | 286,0 lux |