


gorenje

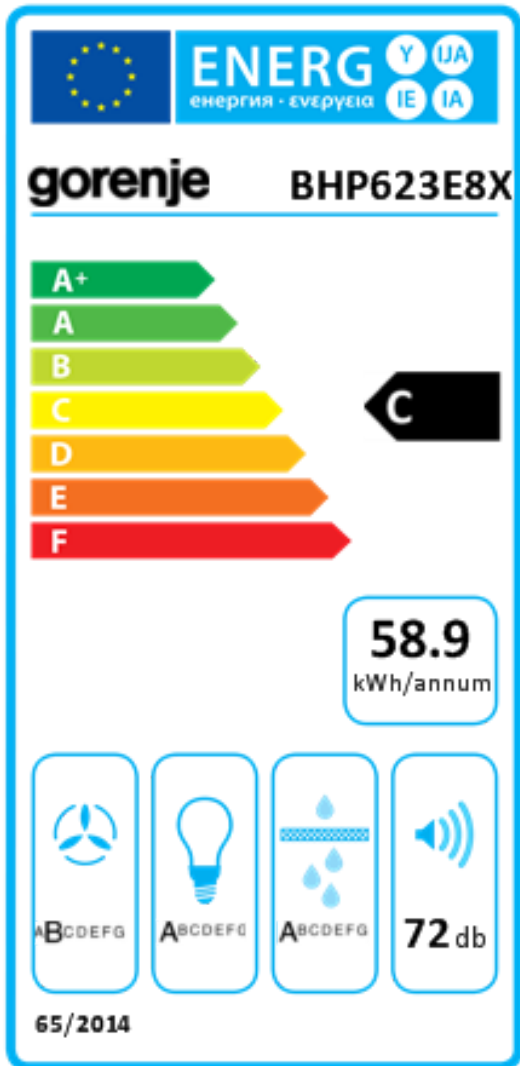

OPLYSNINGSSKEMA

| | |
|---|-------------------------|
| Model | BHP623E8X |
| Annual Energy Consumption - AEC _{hood} | 58,9 kWh/a |
| Energi klasse | C |
| Fluid Dynamic Efficiency - FDE | 25,0 % |
| Fluid Dynamic Efficiency class | B |
| Light Efficiency - LE _{hood} | 42,8 lux/W |
| Lighting Efficiency Class | A |
| Grease Filtering Efficiency - GFE _{hood} | 95,9 % |
| Grease Filtering Efficiency class | A |
| A-weighted Sound Power Emission at minimum speed | 353 m ³ /h |
| Maximum Air Flow in normal use | 578 m ³ /h |
| Air Flow at intensive/boost setting | - |
| A-weighted Sound Power Emission at minimum speed | 63 dB(A) re 1pW |
| A-weighted Sound Power Emission at maximum speed | 72 dB(A) re 1pW |
| A-weighted Sound Power Emission at intensive or boost speed | - |
| Power consumption off mode - P _O | - |
| Power consumption in standby mode - P _S | - |
| Time increase factor | 1,1 |
| Energy Efficiency Index -EEI | 63,1 |
| Measured air flow rate at best efficiency point - Q _{bep} | 338,9 m ³ /h |
| Measured air pressure at best efficiency point - P _{bep} | 360,0 Pa |
| Maximum air flow - Q _{max} | 578 m ³ /h |
| Measured electric power input at best efficiency point - W _{bep} | 135,8 W |
| Nominal power of the lighting system - W _L | 6,0 W |
| Average illumination of the lighting system on the cooking surface - E _{average} | 257,0 lux |